

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 22 TOWNSHIP 14 RANGE 3

DATE: 8-2-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 7-8-97

IN. S.P.C. E ZONE NAD '83

NAME: 14032208

N: 487073.7049(m)

E: 55340.8065(m)

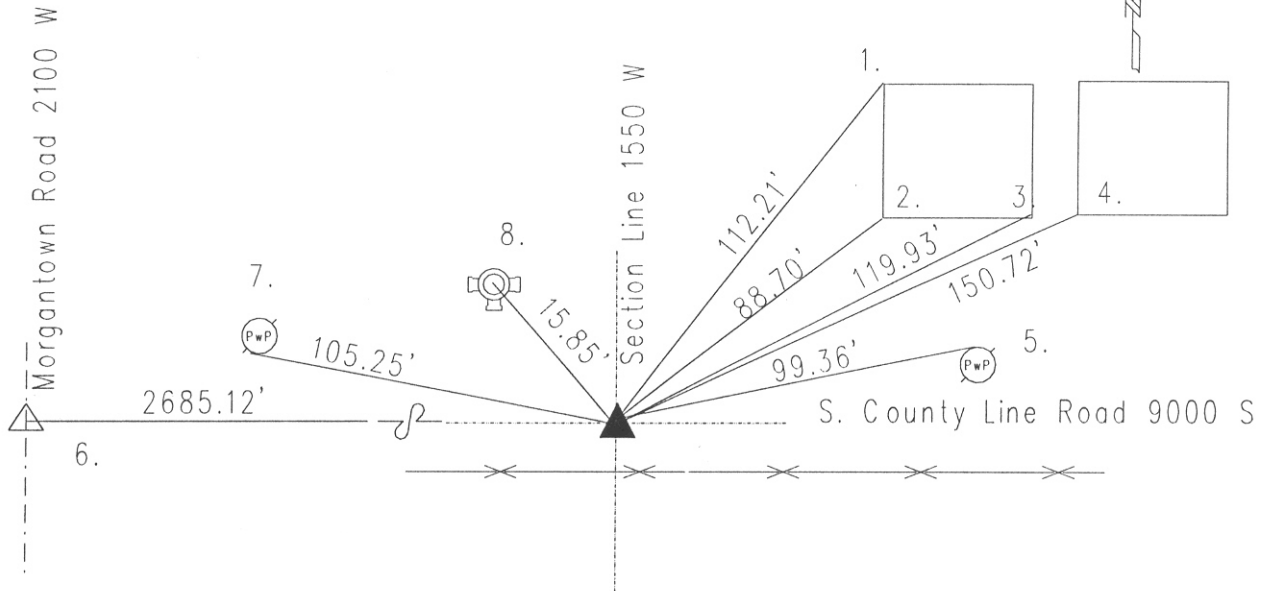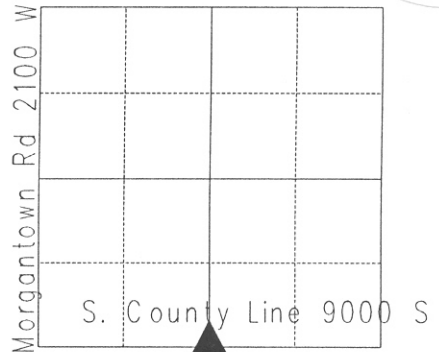

Original post set 1820 by Laughlin with witness: 36" elm S 29 W 15 links; 10" ash N 25 E 18 links per Marion County Atlas pg. 5. Fatout 9-28-1850 called a set stake for rock with witness: N 38 1/2 E 31 3/4 links; and set stake for rock N 12 1/4 W 23 3/4 links per Perry Township Legal Survey Book pg. 44. Rooker 3-9-45 called railroad spike over stone. Miller 7-11-75 called 3/4" steel pin. Wilcoxon 1-13-86 called same. Kiste 5-14-96 called same. Excavated by Wilcoxon 8-14-97 steel pin found 4" down. Harrison set. Re-tied 8-2-04 by Wilcoxon. 14032208

REF.	DISTANCE	DESCRIPTION
1.	112.21'	NW corner of block foundation ADDRESS 1404
2.	88.70'	SW corner "
3.	119.93'	SE corner "
4.	150.72'	SW corner of brick ADDRESS 1376
5.	99.36'	Mag nail w/brass washer N PwP#1-813 10"up
6.	2685.12'	Due W to SW cor. 22-14-3 (Harrison)
7.	105.25'	Road nail SW PwP#21-812 12"up
8.	15.85'	Top nut of fire hydrant